


Deck Attachment to Boise Rim Joist

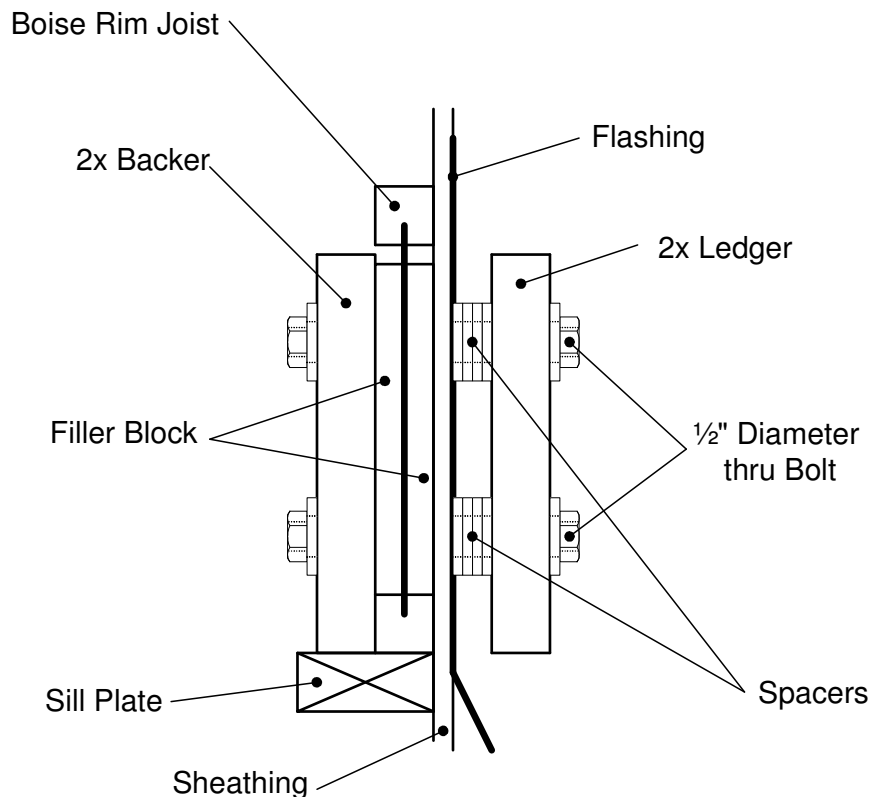

Notes:

1. Nail rim joist to sill plate per the *Boise Installation Guide*.
2. Filler block thickness per the *Boise Installation Guide* for the depth and series used.
3. Design value of bolt is 300 lbs.
4. Pre-drilled bolt holes shall be the same diameter as the bolt. A washer not less than a standard cut washer shall be between the wood and the bolt head and the wood and the nut. A 2" edge distance is required.
5. All bolts and washers to be galvanized or stainless steel to prevent rusting.
6. Flashing and spacing per governing building code.