

ANCHOR™

BOISE CASCADE FIXTURE GRADE



Strength. Security. Stability.

Specially engineered for slatwall
(slotwall) applications

Industry-leading internal bond (IB)

Bright and consistent color

100% recycled fiber**

Supports up to 6 LEED® credits

ECO-Certified Composite Certified

FSC® certified available

888-264-7372

www.bc.com/anchor



Boise Cascade


ANCHOR™

BOISE CASCADE FIXTURE GRADE

ANSI F18 or Carb Phase 2

ANCHOR™ BOISE CASCADE FIXTURE GRADE is specially engineered for slatwall (slotwall) applications and the store fixture market. It carries industry leading internal bond (IB), along with a light and consistent color that laminates seamlessly. ANCHOR™ is made from 100% recycled fiber** and available FSC® certified. Extensive testing determines **ANCHOR™ is up to 50% stronger than premium MDF in slatwall applications:**

Conforms to American Society of Testing and Materials Fire Test Method E-84 (flamespread rating is Class C).
Canadian Standard CAN/ULC-S102-M

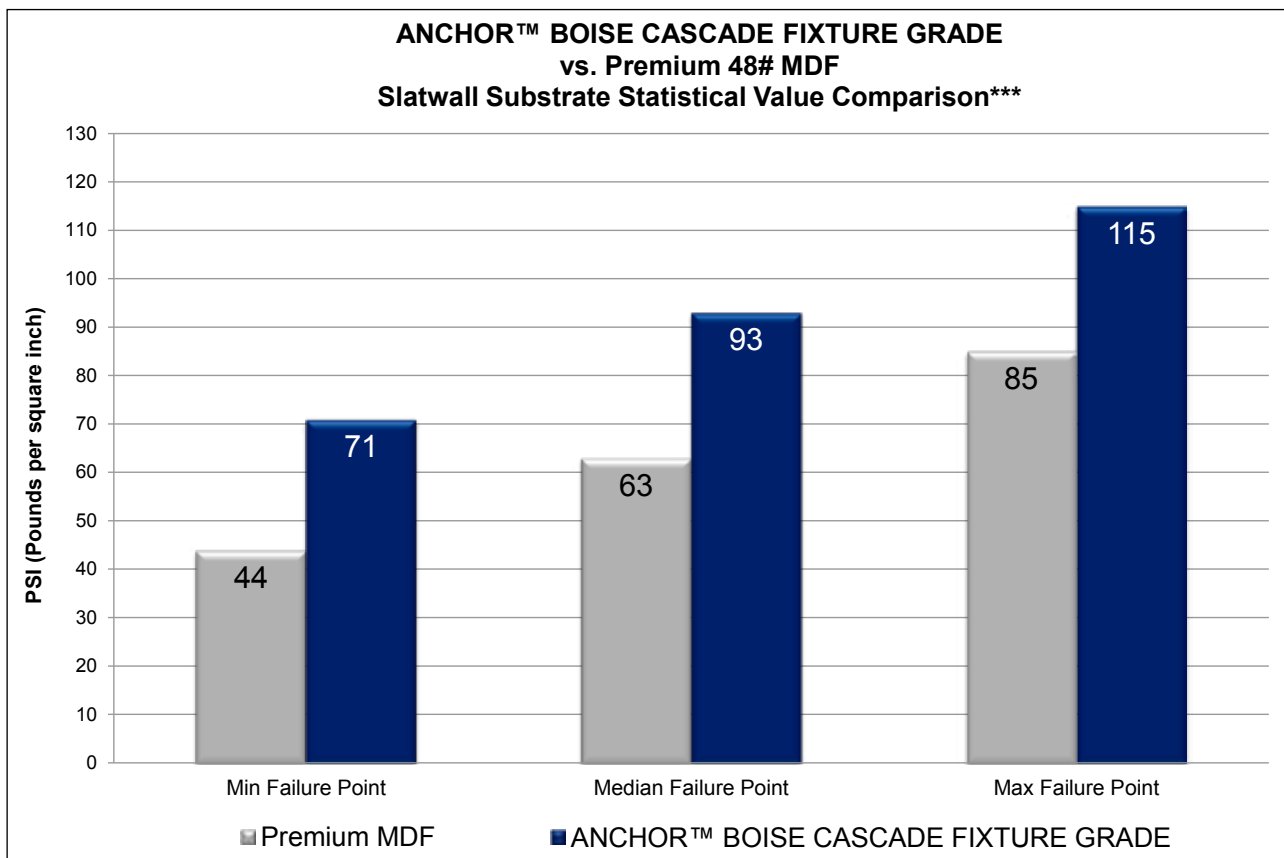

MANUFACTURING TOLERANCES	IMPERIAL	METRIC
Thickness Average from Target Value* <i>*Target value 0.005 under nominal</i>	±0.005 inches	±0.127 mm
Thickness Range (<i>within panel</i>) from Panel Average Value	±0.004 inches	±0.1016 mm
Length and Width (<i>within panel</i>) from Specified Size	±0.0625 inches	±1.5875 mm
Squareness (<i>within panel</i>) Maximum Deviation Between Diagonal Measurements	0.125 inches	3.175 mm
Straightness (<i>within panel</i>) Maximum Bow per 8' Length	0.0625 inches	1.5875 mm

**100% recycle fiber refers to ECO-Certified Composite (ECC) Sustainability Standard CPA 4-11 - Oct 2011
*** 2 inch slatwall bracket offset by 3 inch

For more information about ANCHOR™, including sales terms and conditions, call **888-264-7372**